
FEMALE END VIEW	_
FEIVIALL LIND VILVY	
5 4 0 0 0 1	
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY 6 = PINK	
Pico fast	

· · · · · · · · · · · · · · · · · · ·					
SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON OR TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	2.0 A				
RATED VOLTAGE [V]	125 V				
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	6x26 AWG				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67				

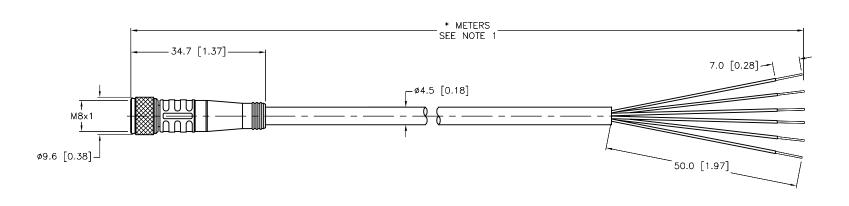

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:						
1. "*" INDICATES LENGTHS.	CABLE LENGTH	IN METERS.	CONTACT	TURCK T	O ORDER	SPECIFIC

DRAWING PROCESSED AS PART OF ECO 33971

REV DESCRIPTION

ATED K TO ORDER SPECIFIC			RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	MINNEAPO 1-800 (763) (763)	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				
		IC	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK	DRFT JBJ	DATE 08/09/01	DESCRIPTION	G 6M-*	M-*			
			SEE SPECIFICATIONS		DSGN	SCALE 1=1.0	ΓN	.G OWI-				
					UNIT OF MEASUREMENT		IDENTIFICATION NO.			REV		
			FINISH		MILLIMETER [INCH]		IDENTIFICATION NO.					
С	вм	04/06/	11 3	33971	SEE SPECIFICATIONS	FOR MORE INFORMATION						
E	ЗΥ	DATE	EC	CO NO.	222 2: 2311 10/1/10/10		DO NOT SCALE	THIS DRAWING	FILE: 777000371		SHEET	1 OF 1