





This 3-way ball valve offers diverting and mixing flow patterns, often eliminating the need for two valves. The full port design is easily automated and is available with various seat materials. The bolts on side flanges make for easy seat changes as necessary to accommodate your service. Available in L or T port configurations.

FLOW PATTERNS

3-Way L-Port



3-Way T-Port



Shaded boxes indicate standard flow path from factory unless otherwise specified by customer. Automated assemblies rotate counter-clockwise standard from the factory when energized. For L-Ports that would be L1 to L2 and T3 to T4 for T-ports. By specifying FCCW or DAR actuators, multiple flow patterns can be achieved to meet process requirements.

Easy to Automate!

See automated data sheets for pre-sized assemblies



Pneumatic



Electric

TRIAC®

Series 31 3-Way Flanged Direct Mount Ball Valve

Sizes 1-1/2" thru 6"

316SST or WCB

Full Port Design

ANSI Class 150

1-pc Ball & Stem

Blowout Proof Stem

RTFE Seats Standard

"L" or "T" Port Option

Trunnion Ball Design

Lockable Manual Handle

ISO 5211 Actuator Mounting Pad
STANDARDS

Design
Flanged Ends
Face-to-Face
Pressure Testing
Mounting
Safety Integrity
Marking System for Valves
Material Certification
Quality Assurance


ANSI/ASME B16.34
ANSI/ASME B16.5
(per factory's standard)
API 598
ISO 5211
IEC 61508:2010; SIL 3
MSS SP-25
EN 10204-3.1 MTR
ISO 9001:2015



HOW TO ORDER MANUAL VALVES

SAMPLE PART #

31C-F1-0200-XXX-

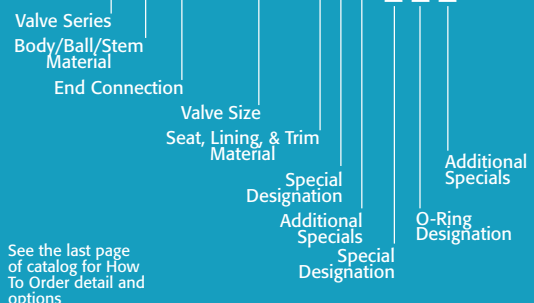

See the last page of catalog for How To Order detail and options

Refer to Series 31 IOM for all repair kit, seat and gasket part numbers.

See Part Number Matrix for itemized options

A-T Controls, Inc.

9955 International Blvd.
Cincinnati, Ohio 45246
www.atcontrols.com

PHONE (513) 247-5465
FAX (513) 247-5462
sales@atcontrols.com

Series 31

3-Way Flanged Ball Valve Full Port, L or T Option ANSI Class 150

MATERIALS LIST

NO.	PART NAME	QTY	STAINLESS STEEL	CARBON STEEL	SPARE PART
1	BODY	1	ASTM A351 GRADE CF8M	ASTM A216 GRADE WCB	
2	END CAP	3	ASTM A351 GRADE CF8M	ASTM A216 GRADE WCB	
3	TOP COVER	1	ASTM A351 GRADE CF8M	ASTM A216 GRADE WCB	
4	BALL & STEM	1	ASTM A351 GRADE CF8M	ASTM A351 GRADE CF8M	
5	SEAT	3	RTFE	RTFE	*
6	THRUST WASHER	1	50/50 STFE	50/50 STFE	*
7	TRUNNION BEARING	1	PEEK	PEEK	*
8	ANTI-STATIC SPRING	1	AISI 316	AISI 316	*
9	JOINT GASKET	3	PTFE	PTFE	*
10	COVER GASKET	1	PTFE	PTFE	*
11	STEM O-RING	1	FKM	FKM	*
12	GLAND PACKING	1 SET	PTFE	PTFE	*
13	GLAND BUSHING	1	AISI 304	AISI 304	
14	BELLEVILLE WASHER	3 *	AISI 301	AISI 301	
15	HANDLE SLEEVE	1	VINYL	VINYL	
16	HANDLE BAR 2-1/2" - 3"	1	AISI 304	AISI 304	
16	HANDLE BAR -4"-6"	1	CARBON STEEL	CARBON STEEL	
17	HANDLE HUB 2-1/2" - 4"	1	ASTM A351 GRADE CF8	ASTM A351 GRADE CF8	
17	HANDLE HUB-6"	1	WCB	WCB	
18	INDICATOR PLATE	1	AISI 304	AISI 304	
19	HANDLE BOLT	1	AISI 304	AISI 304	
20	HANDLE 1-1/2" - 2"	1	AISI 304	AISI 304	
21	PACKING GLAND	1	ASTM A351 GRADE CF8	ASTM A351 GRADE CF8	
22	HANDLE STOP BOLT	1	AISI 304	AISI 304	
23	NUT & WASHER	1	AISI 304	AISI 304	
24	BODY STUD	#	ASTM A193 GRADE B8	ASTM A193 GRADE B8	
25	BODY NUT	#	ASTM A194 GRADE 8	ASTM A194 GRADE 8	
26	COVER STUD	^	ASTM A193 GRADE B8	ASTM A193 GRADE B8	
27	COVER STUD	^	ASTM A194 GRADE 8	ASTM A194 GRADE 8	
28	PACKING GLAND BOLT	2	AISI 304	AISI 304	
29	PACKING GLAND NUT	2	AISI 304	AISI 304	

* On 6" valve, qty is 8 pcs (4 on each packing gland bolt)


1-1/2" THRU 3" = Qty. 12 pcs | 4" = Qty. 18 pcs | 6" = Qty. 30 pcs

^ 1-1/2" THRU 3" = 4 pcs, 4" = 6 pcs., 6" = 12 pcs

TFM™ is a trademark of Dyneon™, a 3M Company.

Kalrez® is a registered trademark of DuPont Performance Elastomers.

A-T Controls reserves the right to change product designs and technical/dimensional specifications without notice.

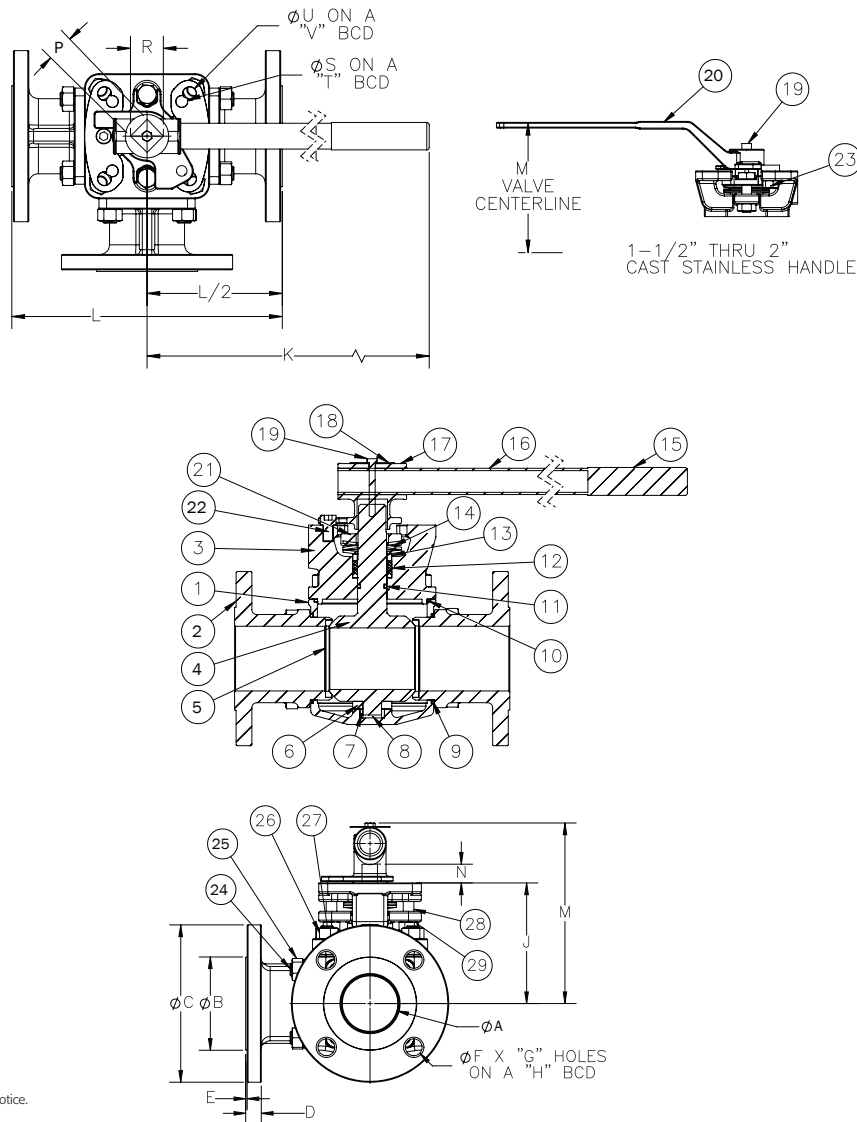


DIMENSIONS For ANSI Class 150 (IN)

	VALVE DIMENSIONS												ACTUATOR MOUNTING DIMENSIONS									
SIZE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	ISO 5211	(LBS)	
1-1/2"	1.57	2.88	5.00	0.56	0.06	0.63	4	3.88	4.13	10.31	7.20	6.16	0.75	0.748	0.93	0.39	2.756	0.47	4.016	F07/F10	25	
2"	1.97	3.62	6.00	0.63	0.06	0.75	4	4.75	4.45	10.31	8.66	6.42	0.75	0.748	0.93	0.39	2.756	0.47	4.016	F07/F10	37	
2-1/2"	2.60	4.12	7.00	0.69	0.06	0.75	4	5.50	5.37	14.37	11.06	8.07	0.83	0.866	1.10	0.47	4.016	0.55	4.921	F10/F12	58	
3"	2.99	5.00	7.50	0.75	0.06	0.75	4	6.00	5.78	19.88	11.22	8.46	0.83	0.866	1.10	0.47	4.016	0.55	4.921	F10/F12	79	
4"	3.98	6.19	9.00	0.94	0.06	0.75	8	7.50	7.52	27.76	13.70	11.06	1.14	1.063	1.38	0.55	4.921	0.71	5.512	F12/F14	129	
6"	5.91	8.50	11.00	1.00	0.06	0.87	8	9.50	9.80	37.60	18.90	13.77	1.50	1.417	1.81	0.71	5.512	0.87	6.496	F14/F16	289	

3-Way Flanged Ball Valve Full Port, L or T Option ANSI Class 150


Series 31

Pressure vs. Temperature - Series 31
Seat Pressure Ratings

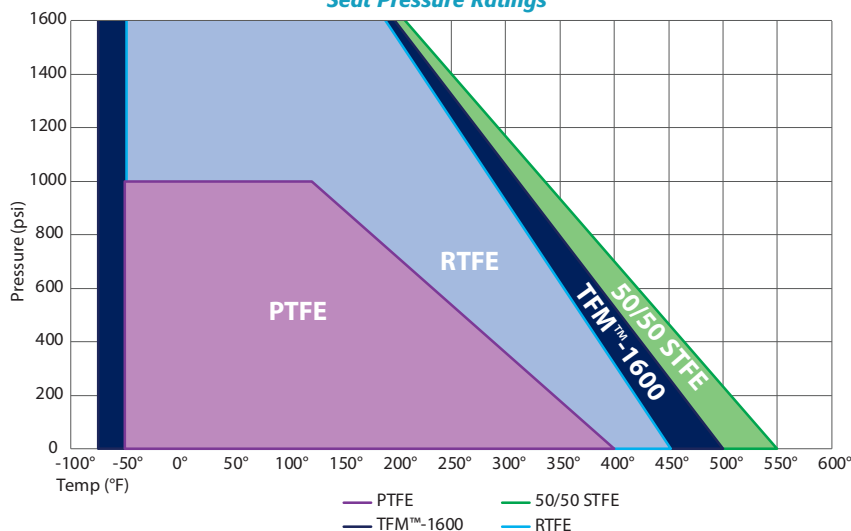

Temp	Pressure - Seat Material			
	RTFE	STFE	PTFE	TFM™-1600
-75°				2000
-50°	2000	2000	1000	2000
100°	2000	2000	1000	2000
122°	2000	2000	1000	2000
150°	1829	1869	899	1852
200°	1524	1636	719	1587
250°	1220	1402	540	1323
300°	915	1168	360	1058
350°	610	935	180	794
400°	305	701	0	529
450°	0	467		265
500°		234		0
550°		0		

Pressure vs. Temperature - Series 31

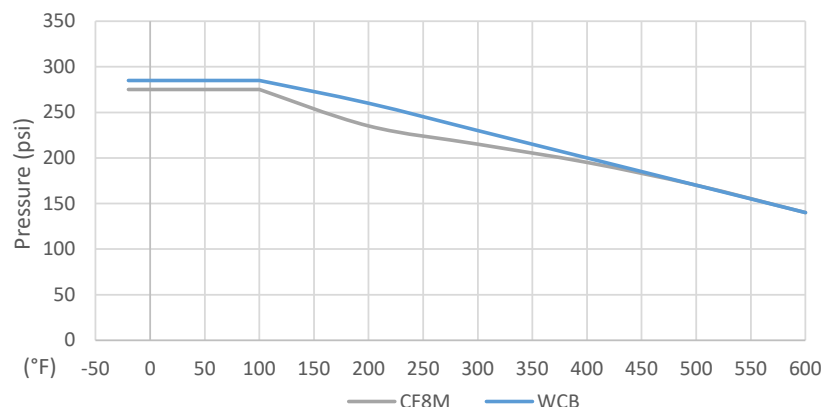

Temp	CF8M psi	WCB psi
-20°	275	285
50°	275	285
75°	275	285
90°	275	285
99°	275	285
100°	275	285
200°	235	260
300°	215	230
400°	195	200
500°	170	170
600°	140	140

31 Series Component Temperature Ratings

COMPONENT	MATERIAL	TEMPERATURE
Stem Packing	PTFE	-50°F to 450°F
	Graphite	-100°F to 1100°F
Gaskets	TFM™-1600	-75°F to 500°F
	PTFE (standard)	-50°F to 400°F
	Graphite	-100°F to 1100°F
Seats (Other Materials Available)	PTFE	-50°F to 400°F
	RTFE (standard)	-50°F to 450°F
	TFM™-1600	-75°F to 500°F
	50/50 STFE	-50°F to 550°F
O-Rings	FKM (standard)	-20°F to 450°F
	Markez® Z1028	5°F to 608°F
	Kalrez® 4079	30°F to 600°F
	Chemraz® 505	-22°F to 446°F
	Kalrez® 6375	-4°F to 527°F
	Perlast® G75M	5°F to 500°F
	Chemraz® 564	-40°F to 445°F
	Low Temp Buna	-65°F to 275°F
	EPDM	-70°F to 250°F
	Silicone	-60°F to 400°F

NOTE: At temperature, valves are limited by either the valve body/ end cap pressure ratings, seat pressure ratings, or packing/stem seal/gaskets; whichever is lower.

Cv Values

VALVE SIZE	T-PORT STRAIGHT THRU	L & T-PORT 90°
1-1/2"	213	54
2"	312	90
2-1/2"	688	159
3"	886	211
4"	1,891	386
6"	5,834	926

Class 150 Torque Values for RTFE Seats

VALVE SIZE	BREAK IN* LBS.
1-1/2"	343
2"	546
2-1/2"	769
3"	1,019
4"	1,814
6"	3,740

Published torques are based on full differential pressure with clean water. Consult the Application Sizing Guide for assistance with sizing actuators.



Pneumatic Double Acting

Automated Ball Valve Package

Series 31 3-Way Flanged Ball Valve

Sizes 1-1/2"-6"

316SST or WCB

ANSI Class 150

Full Port Design

1-pc Ball & Stem

Blowout Proof Stem

RTFE Seats Standard

"L" or "T" Port Option

Trunnion Ball Design

ISO 5211 Actuator Mounting Pad

STANDARDS

Design	ANSI/ASME B16.34
Flanged Ends	ANSI/ASME B16.5
Face-to-Face	(per factory's standard)
Pressure Testing	API 598
Mounting	ISO 5211
Safety Integrity	IEC 61508:2010; SIL 3
Marking System for Valves	MSS SP-25
Material Certification	EN 10204-3.1 MTR
Quality Assurance	ISO 9001:2015





Flanged 3-Way

For operating temperatures in excess of 175° F with Buna-N seals in the actuator, an extended bracket is required. FKM seals in the actuator require an extended bracket for more than 300° F. Please consult factory for sizing information.

Class 150 Double Acting Assembly DIMENSIONS (IN)

VALVE SIZE	A	B	C	D	E
1-1/2"	9.29	9.66	7.20	4.41	5.00
2"	10.87	10.38	8.66	4.83	6.00
2-1/2"	13.90	13.06	11.06	6.05	7.00
3"	15.16	14.22	11.22	6.69	7.50
4"	15.16	15.96	13.70	6.69	9.00
6"	22.68	20.27	18.90	8.42	11.00

DIMENSIONS SHOWN ARE FOR ASSEMBLIES SIZED FOR 80 PSI SUPPLY

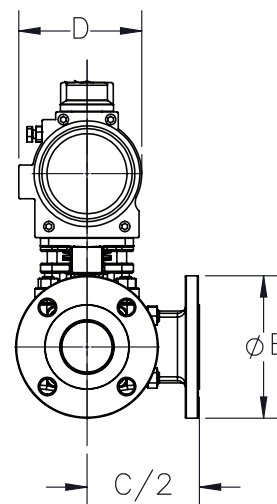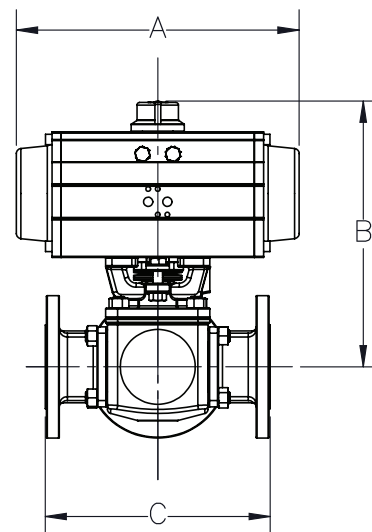

SERIES 31 3-Way 150# Flanged Direct Mount

SIZED FOR 80 psi AIR SUPPLY

SIZE	MODEL
1-1/2"	31-FX-150/2R3D-XX-*
2"	31-FX-200/2R4D-XX-*
2-1/2"	31-FX-250/2R6D-XX-*
3"	31-FX-300/2R7D-XX-*
4"	31-FX-400/2R7D-XX-*
6"	31-FX-600/2R9D-XX-*

SIZED FOR 60 psi AIR SUPPLY

SIZE	MODEL
1-1/2"	31-FX-150/2R4D-XX-*
2"	31-FX-200/2R5D-XX-*
2-1/2"	31-FX-250/2R6D-XX-*
3"	31-FX-300/2R8D-XX-*
4"	31-FX-400/2R8D-XX-*
6"	31-FX-600/2R9D-XX-*

* Must specify L or T port

Actuators are sized for clean liquid surface with a specific gravity of 1 and at 70° F.

SAMPLE PART

31C-FX-150/2R3D-

- (2) Valve Series
- (3) Body/Ball/Stem Material
- (4) End Connection
- (5) Seat, Lining & Trim Material
- (6) Valve Size
- (7) Actuator
- (8) Accessories/Options
- (9) Accessories
- (10) Special Designation

Refer to Series 31 IOM for all repair kit, seat and gasket part numbers.

See the last page of catalog for How To Order detail and options.

See Automated Part Number Matrix for complete part number and options.

OPTIONS

DESCRIPTION	PART NO. SUFFIX	DESCRIPTION	PART NO. SUFFIX
Type 4 Solenoid	(A)	Type 4 Limit Switch (2) spdt	(A)
Type 7 Solenoid	(B)	Type 7 Limit Switch (2) spdt	(B)
Intrinsically Safe Solenoid	(C)	Intrinsically Safe Limit Switch	(C)

Other options available - call for details
Actuators are sized based on clean/clear fluid.



9955 International Blvd.
Cincinnati, Ohio 45246
www.atcontrols.com

PHONE (513) 247-5465
FAX (513) 247-5462
sales@atcontrols.com



Pneumatic Spring Return

Automated Ball Valve Package

Series 31 3-Way Flanged Ball Valve

Sizes 1-1/2"-6"
316SST or WCB
ANSI Class 150
Full Port Design
1-pc Ball & Stem
Blowout Proof Stem
RTFE Seats Standard
"L" or "T" Port Option
Trunnion Ball Design
ISO 5211 Actuator Mounting Pad

STANDARDS

Design	ANSI/ASME B16.34
Flanged Ends	ANSI/ASME B16.5
Face-to-Face	(per factory's standard)
Pressure Testing	API 598
Mounting	ISO 5211
Safety Integrity	IEC 61508:2010; SIL 3
Marking System for Valves	MSS SP-25
Material Certification	EN 10204-3.1 MTR
Quality Assurance	ISO 9001:2015





Flanged 3-Way

For operating temperatures in excess of 175° F with Buna-N seals in the actuator, an extended bracket is required. FKM seals in the actuator require an extended bracket for more than 300° F. Please consult factory for sizing information.

Class 150 Spring Return Assembly DIMENSIONS (IN)

VALVE SIZE	A	B	C	D	E
1-1/2"	11.46	10.45	7.20	5.19	5.00
2"	13.90	12.14	8.66	6.05	6.00
2-1/2"	13.90	13.47	11.06	6.05	7.00
3"	20.95	15.60	11.22	7.64	7.50
4"	22.68	18.18	13.70	8.42	9.00
6"	24.37	21.22	18.90	9.29	11.00

DIMENSIONS SHOWN ARE FOR ASSEMBLIES SIZED FOR 80 PSI SUPPLY

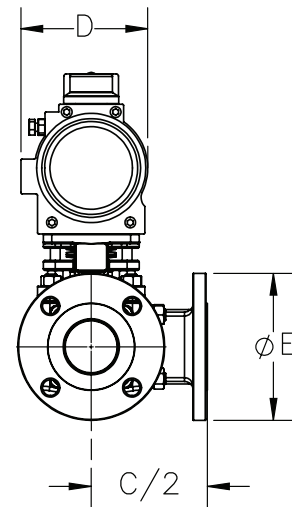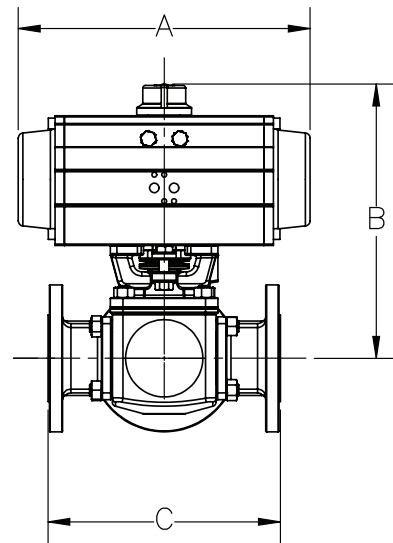

SERIES 31 3-Way 150# Flanged Direct Mount

SIZED FOR 80 psi AIR SUPPLY

SIZE	MODEL
1-1/2"	31-FX-150/2R5S-XX-*
2"	31-FX-200/2R6S-XX-*
2-1/2"	31-FX-250/2R6S-XX-*
3"	31-FX-300/2R8S-XX-*
4"	31-FX-400/2R9S-XX-*
6"	31-FX-600/2R0S-XX-*

SIZED FOR 60 psi AIR SUPPLY

SIZE	MODEL
1-1/2"	31-FX-150/2R6S4-XX-*
2"	31-FX-200/2R6S4-XX-*
2-1/2"	31-FX-250/2R7S4-XX-*
3"	31-FX-300/2R9S4-XX-*
4"	31-FX-400/2R9S4-XX-*
6"	31-FX-600/2R0S4-XX-*

* Must specify L or T port

NOTE: A number following the actuator model (Ex: 2R6S4), indicates the number of springs per side. For a standard (5 spring per side) actuator, the spring designation is omitted from the automated part number.

Actuators are sized for clean liquid surface with a specific gravity of 1 and at 70° F.

OPTIONS

DESCRIPTION	PART NO. SUFFIX	DESCRIPTION	PART NO. SUFFIX
Type 4 Solenoid	(A)	Type 4 Limit Switch (2) spdt	(A)
Type 7 Solenoid	(B)	Type 7 Limit Switch (2) spdt	(B)
Intrinsically Safe Solenoid	(C)	Intrinsically Safe Limit Switch	(C)

Other options available - call for details. Actuators are sized based on clean/clear fluid. Specify flow pattern when ordering. See automated part number matrix for complete part number and options.

SAMPLE PART

31C-FX-150/2R6S4-

- (2) Valve Series
- (3) Body/Ball/Stem Material
- (4) End Connection
- (5) Seat, Lining, & Trim Material
- (6) Valve Size
- (7) Actuator
- (8) Accessories/Options
- (9) Accessories
- (10) Special Designation

Refer to Series 31 IOM for all repair kit, seat and gasket part numbers.

See the last page of catalog for How To Order detail and options.

See Automated Part Number Matrix for complete part number and options.



A-T Controls, Inc.

9955 International Blvd.
Cincinnati, Ohio 45246
www.atcontrols.com

PHONE (513) 247-5465
FAX (513) 247-5462
sales@atcontrols.com



Electric

Automated Ball Valve Package

Series 31 3-Way Flanged Ball Valve

Sizes 1-1/2" - 6"

316SST or WCB

Full Port Design

ANSI Class 150

1-pc Ball & Stem

Blowout Proof Stem

RTFE Seats Standard

"L" or "T" Port Option

Trunnion Ball Design

ISO 5211 Actuator Mounting Pad

STANDARDS

Design	ANSI/ASME B16.34
Flanged Ends	ANSI/ASME B16.5
Face-to-Face	(per factory's standard)
Pressure Testing	API 598
Mounting	ISO 5211
Safety Integrity	IEC 61508:2010; SIL 3
Marking System for Valves	MSS SP-25
Material Certification	EN 10204-3.1 MTR
Quality Assurance	ISO 9001:2015





Flanged 3-Way

For operating temperatures in excess of 158° F with an electric actuator, an extended bracket is required. Please consult factory for sizing information.

Class 150 Electric Assembly DIMENSIONS (IN)

VALVE SIZE	A	B	C	D	E	F
1-1/2"	9.02	14.68	7.20	13.31	5.00	10.43
2"	9.02	15.00	8.66	13.31	6.00	10.43
2-1/2"	10.20	16.79	11.06	14.49	7.00	11.26
3"	10.20	17.20	11.22	14.49	7.50	11.26
4"	10.20	18.94	13.70	14.49	9.00	11.26
6"	11.69	22.60	18.90	16.14	11.00	12.09

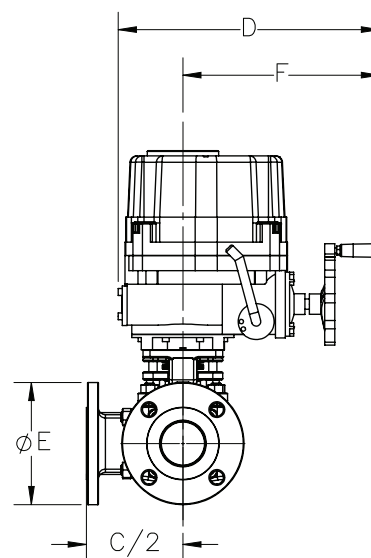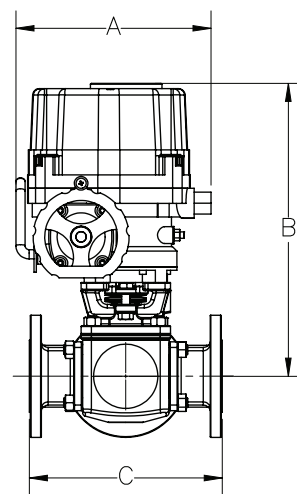

SERIES 31 3-Way 150# Flanged Direct Mount

ON-OFF

SIZE	MODEL
1-1/2"	31-FX-150/WEC1-XX-*
2"	31-FX-200/WEC1-XX-*
2-1/2"	31-FX-250/WEE1-XX-*
3"	31-FX-300/WEF1-XX-*
4"	31-FX-400/WEF1-XX-*
6"	31-FX-600/WEH1-XX-*

MODULATING

SIZE	MODEL
1-1/2"	31-FX-150/WEC2-XX-*
2"	31-FX-200/WED2-XX-*
2-1/2"	31-FX-250/WEF2-XX-*
3"	31-FX-300/WEG2-XX-*
4"	31-FX-400/WEG2-XX-*
6"	31-FX-600/WEH2-XX-*

* Must specify L or T port

Actuators are sized for clean liquid surface with a specific gravity of 1 and at 70° F.

OPTIONS

DESCRIPTION

24 VAC/24 VDC/220VAC

Feedback potentiometer

NOTE: Heater and thermostat standard
(2) auxiliary switches standard

Other options available - call for details
Actuators are sized based on clean/clear fluid.

SAMPLE PART # 31C-FX-150/WEC1-

- (2) Valve Series
- (3) Body/Ball/Stem Material
- (4) End Connection
- (5) Seat, Lining & Trim Material
- (6) Valve Size
- (7) Actuator
- (8) Accessories/Options
- (9) Accessories
- (10) Special Designation

Refer to Series 31 IOM for all repair kit, seat and gasket part numbers.

See the last page of catalog for How To Order detail and options.

See Automated Part Number Matrix for complete part number and options.



A-T Controls, Inc.

9955 International Blvd.
Cincinnati, Ohio 45246
www.atcontrols.com

PHONE (513) 247-5465
FAX (513) 247-5462
sales@atcontrols.com

HOW TO ORDER: Manual Valves

2	Valve Series
31	3-Way Flanged, Direct Mount, Full Port

3	Body/Ball/Stem Material
Blank	Valve Series Standard (316SST)
C	Carbon Steel Body

4	End Connection
F1	150# Flanged Ends
F3	300# Flanged Ends
XX	Configurable End Connections

5	Valve Size
0150	1-1/2" 0300 3"
0200	2" 0400 4"
0250	2-1/2" 0600 6"

6	Seat, Lining & Trim Material
X	Reinforced TFE Seats (RTFE)
P	Virgin TFE Seats (PTFE)
S	50/50 STFE Seats
T	TFM™-1600 Seats
A	50% SS Powder/50% TFM™-1600 (STFM)
E	All TFM™-1600 Seats, Seals, & Packing
G	STFE Seats w/ Non-Standard Graphite Packing & Gaskets

7	Special Designation
X	No Specials/Series Standard
G	Gear Operator
H	Gear Operator with Lockout Plate
4	4" Lockable Stem Extension

8	Additional Specials
X	No Specials/Series Standard
O	Oxygen Cleaned
Z	Special End Configuration
V	Vented Ball
E	Bonnet Extension Lockable Handle
F	Fugitive Emissions Bonnet
D	Degreased & Bagged
A	Vented Ball, Degreased & Bagged
B	Vented Ball, Oxygen Cleaned


OPTIONS:

9	Special Designation
L	L-Port, 3-Way arrangement
T	T-Port, 3-Way arrangement

10	O-Ring
Blank	Standard
X	Multiple Option Designation
2	Markez® Z1028
4	Karlez 4079
5	Chemraz® 505
6	Karlez 6375
7	Perlast® G75M
9	Chemraz® 564
B	Low Temp Buna
E	EPDM
S	Silicone

11	Additional Specials
Blank	Standard
X	Multiple Option Designation
B	B7M Bolting
M	Marine Epoxy Coating

17-4 PH® is a registered trademark of AK Steel Corporation.
Chemraz® is a registered trademark of Greene, Tweed & Co.
Markez® is a registered trademark of Marco Rubber & Plastic Products Inc.
Perlast® is a registered trademark of Precision Polymer Engineering Limited.
TFM™ is a trademark of Dyneon™, a 3M Company.

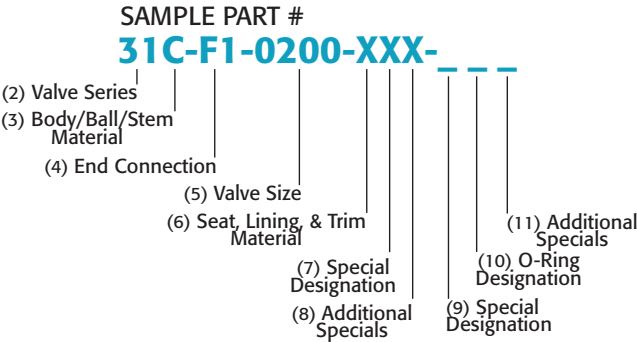

Refer to Series 31 IOM for all repair kit, seat and gasket part numbers.



Series 31

HOW TO ORDER: Automated Valves

2	Valve Series
31	3-Way Flanged, Direct Mount, Full Port

3	Body/Ball/Stem Material
Blank	Valve Series Standard (316SST)
C	Carbon Steel Body

4	End Connection
F	150# Flanged Ends
3	300# Flanged Ends

5	Seat, Lining & Trim Material
X	Reinforced TFE Seats (RTFE)
P	Virgin TFE Seats (PTFE)
S	50/50 STFE Seats
T	TFM™-1600 Seats
A	50% SS Powder/50% TFM™-1600 (STFM)
E	All TFM™-1600 Seats, Seals, & Packing
G	STFE Seats w/ Non-Standard Graphite Packing & Gaskets

6	Valve Size
150	1-1/2" 300 3"
200	2" 400 4"
250	2-1/2" 600 6"

7	Actuator - Pneumatic (DA)
TRYD	TR10DA 2R7D 2R500DA
TR1D	TR20DA 2R8D 2R850DA
2R2D	2R40DA 2R9D 2R1200DA
2R3D	2R80DA 2R0D 2R1750DA
2R4D	2R130DA 2RAD 2R2500DA
2R5D	2R200DA 2RBD 2R3500DA
2R6D	2R300DA

7	Actuator - Pneumatic (SR)
TR1S	TR20SR 2R7S 2R500SR
2R2S	2R40SR 2R8S 2R850SR
2R3S	2R80SR 2R9S 2R1200SR
2R4S	2R130SR 2R0S 2R1750SR
2R5S	2R200SR 2RAS 2R2500SR
2R6S	2R300SR 2RBS 2R3500SR

7	Actuator - Pneumatic Stainless (DA)
S21D	S2-052DA S25D S2-125DA
S22D	S2-063DA S26D S2-140DA
S23D	S2-083DA S27D S2-160DA
S24D	S2-105DA S28D S2-210DA

7	Actuator - Pneumatic Stainless (SR)
S21S	S2-052SR S25S S2-125SR
S22S	S2-063SR S26S S2-140SR
S23S	S2-083SR S27S S2-160SR
S24S	S2-105SR S28S S2-210SR

7	Actuator - Electric (On-Off)
WEX1	WE-350 WEG1 WE-5200
WEA1	WE-500 WEH1 WE-6900
WEB1	WE-690 WEJ1 WE-10500
WEC1	WE-1350 WEK1 WE-17500
WED1	WE-1700 WEL1 WE-25900
WEE1	WE-2640 WEM1 WE-53000
WEF1	WE-4400 WEN1 WE-80000

7	Actuator - Electric (Modulating)
WEA2	WEM-500 WEH2 WEM-6900
WEB2	WEM-690 WEJ2 WEM-10500
WEC2	WEM-1350 WEK2 WEM-17500
WED2	WEM-1700 WEL2 WEM-25900
WEE2	WEM-2640 WEM2 WEM-53000
WEF2	WEM-4400 WEN2 WEM-80000
WEG2	WEM-5200

OPTIONS:

8	Accessories/Options	Model no.
X	No Specials	
A	TYPE 4 Solenoid 120VAC	TVCS-X411-4N-A120
B	TYPE 7 Solenoid 120VAC	TVC6-X411-7N-A120
C	Intrinsically Safe Solenoid	TVIS-X411-4N-D24
D	TYPE 4 Solenoid 24VDC	TVCS-X411-4N-D24
F	TYPE 7 Solenoid 24VDC	TVC6-X411-7N-D24
Q	TYPE 4 SST Solenoid 120VAC	TVSS-X411-4N-A120
M	TYPE 7 SST Solenoid 120VAC	TVSS-X411-7N-A120
L	TYPE 4 SST Solenoid 24VDC	TVSS-X411-4N-D24
N	TYPE 7 SST Solenoid 24VDC	TVSS-X411-7N-D24
P	Pneumatic Positioner	PPR-1200
E	Electro-Pneumatic Positioner	EPR-1000
R	24VDC Electric Actuator	
S	220VAC Electric Actuator	
T	Other Voltage Electric Actuator	
W	12VDC Electric Actuator	
Y	24VAC Electric Actuator	


* No voltage specified on electric assemblies denotes 120VAC

9	Accessories	Model no.
X	No Specials	
A	TYPE 4 Limit Switch	APL-210N/APL-310N
B	TYPE 7 Limit Switch	APL-510N
C	Intrinsically Safe Limit Switch	APL-218N
Q	TYPE 4 SST Limit Switch	APL-910N
M	TYPE 7 SST Limit Switch	APL-510S
Z	180° Operation	
1	HS1 High Speed Electric	
2	HS2 High Speed Electric	

10	Special Designation
L	L-Port, 3-Way arrangement
T	T-Port, 3-Way arrangement

SAMPLE PART

31C-FX-200/2R3D-

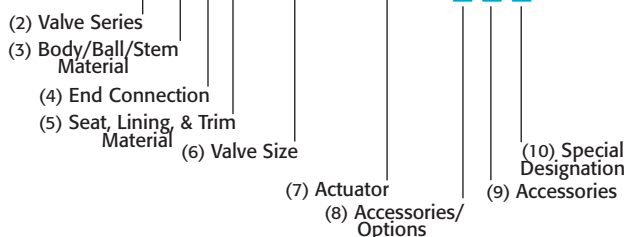

Refer to Series 31 IOM for all repair kit, seat and gasket part numbers.