

VEGAWELL 52

4 ... 20 mA

Submersible pressure transmitter with ceramic measuring cell



Application area

VEGAWELL 52 is suitable for continuous level measurement of liquids. Typical applications are measurements in water/waste water facilities, deep wells and in the shipbuilding industry.

Your benefit

- · High reliability through maximum overload and vacuum resistance of the ceramic measuring cell
- High plant availability through integrated overvoltage protection
- · Versatile use thanks to robust housing and cable version

Function

The ceramic CERTEC® measuring cell is the heart of VEGAWELL 52. The hydrostatic pressure of the liquid column causes a capacitance change in the measuring cell via the ceramic diaphragm. This change is converted into a standard 4 ... 20 mA signal. The entire measuring cell consists of high purity ceramic and is characterised, apart from its excellent long-term stability, by very high overload resistance.

Technical data

Measuring ranges +0.1 ... +60 bar/+10 ... +6000 kPa

(+1.45 ... +870.2 psig)

Smallest measuring range +0.1 bar/+10 kPa (+1.45 psig) 0.1 %

Deviation in character-

Process fitting Straining clamp, threaded fitting unassem-

bled from G1 (ISO 228-1) or from 1 NPT, thread G11/2 (ISO 228-1) or from 11/2 NPT

on the housing

-20 ... +80 °C (-4 ... +176 °F) Process temperature

Ambient, storage and transport temperature -40 ... +80 °C (-40 ... +176 °F)

Operating voltage

8 ... 35 V DC

Materials

istics

The transmitter of the instrument is made of 316L, Duplex (1.4462), Titanium or PVDF. The process seal consists of FKM, FFKM or EPDM, the suspension cable of PE, PUR or FEP.

You will find a complete overview of the available materials and seals in the "Configurator" at www.vega.com and "VEGA Tools".

Housing versions

Apart from the version with unassembled cable end, there is also a version with single chamber housing and thread available.

The housing in protection rating IP 66/IP 67 is available in plastic or stainless steel precision casting.

Electronics versions

The instruments are available in different electronics versions. Apart from the analogue/digital two-wire electronics 4 ... 20 mA/HART Pt 100, a pure analogue version 4 ... 20 mA is also possible.

Approvals

The instruments are suitable for use in hazardous areas and are approved e.g. according to ATEX and IEC. The instruments also have various ship approvals such as e.g. GL, LRS or ABS.

You can find detailed information at www.vega.com/downloads and "Approvals".






Operation

An adjustment of the instrument is not necessary and not possible. The measuring range corresponds to the value set at the factory.

Electrical connection

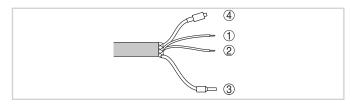


Wire assignment, suspension cable

- 1 Blue (-): to power supply or to the processing system
- 2 Brown (+): to power supply or to the processing system
- 3 Shielding
- 4 Breather capillaries with filter element

You can find details on electrical connection in the instrument operating instructions at www.vega.com/downloads.

Dimensions

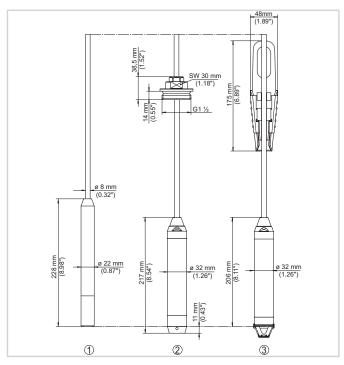

Dimensions VEGAWELL 52

- 1 Standard version
- 2 Version with adjustable screw connection for suspension cable G1½ A, with impact protection
- 3 Version with straining clamp and detachable plastic basket guard

Information

You can find further information about the VEGA product line on www.vega.com.

In the download section at www.vega.com/downloads you'll find operating instructions, product information, brochures, approval documents, instrument drawings and much, much more.

There, you will also find GSD and EDD files for Profibus PA systems as well as DD and CFF files for Foundation Fieldbus systems.

Instrument selection

With the "Finder" at www.vega.com/finder and "VEGA Tools" you can select the most suitable measuring principle for your application.

You can find detailed information on the instrument versions in the "Configurator" at www.vega.com/configurator and "VEGA Tools".

Contact

You can find the VEGA agency serving your area on our homepage www.vega.com.