


SPECIFICATIONS					
CONTACT CARRIER MATERIAL	NYLON OR TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLUE				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	4x22 AWG				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K				
	·				

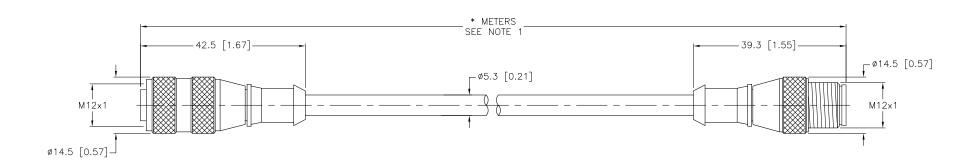

CABLE LENGTH	TOLERANCE			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			

KMY

10/24/11

DATE

## NOTES:

REV DESCRIPTION

E UPDATE CABLE DIAMETER

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

	RELATED DOCUMENTS  1. 2. 3. 4.		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
		MATERIAL		DRFT RWC	DATE 04/23/07	DESCRIPTION  RK 4.41T-*-RS	1 11T	
		SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0	KK 4.411-*-K5	4.411	
		REFERENCE UNLI		UNIT OF ME	UNIT OF MEASUREMENT IDENTIFICATION NO.			REV
			CONTACT TURCK FOR MORE	MILLIMETER [ INCH ]		DENTINO/ITOT NO.		F
1	35967	SEE SPECIFICATIONS	INFORMATION					_
T	ECO NO.			DO NOT SCALE	THIS DRAWING	FILE: 777003378	SHEET	1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY