

Smart Positioner YT-2700

Product Number: YT-2700 S n 1 2 1 2 0 1 (specify your requirement)

Model	Motion Type	Acting Type	Explosion Proof	Lever Type					Connection Type	Communication	Option	Fail Option
				Linear	Rotary							
YT-2700	L Linear	S Single	n Non-Explosion	1 5~35mm	1 M6×34L	1 PT	0 NONE	0 NONE	F Fail Freeze			
	R Rotary			i Ex ia IIC T5/T6	2 8~50mm					2 M6×63L	2 NPT	2 + HART
					3 M8×34L							
					4 M8×63L							
					5 NAMUR							




YT-2700



compact size

Item · Type	YT-2700L	YT-2700R
Input Signal	4~20mA DC	
Supply Pressure	0.14~0.7MPa(1.4~7 bar)	
Stroke	5~35mm	0 ~ 90°
Impedance	Max.500Ω @ 20mA DC	
Air Connection	PT(NPT)1/4	
Gauge Connection	PT(NPT)1/8	
Conduit	PF1/2 (G1/2)	
Ambient Temp.	Operating Temp.	-30°C ~ 80°C (-22~176° F)
	Explosion Temp.	-40~60°C(T5) / -40~40°C(T6)
Linearity	±0.5% F.S.	
Hysteresis	±0.5% F.S.	
Sensitivity	±0.2% F.S.	
Repeatability	±0.3% F.S.	
Air Consumption	0.01LPM (sup=0.14MPa)	
Flow Capacity	9LPM(sup=0.14MPa)	
Output Characteristics	Linear, EQ%, Quick Open user set (16 Point)	
Material	Aluminum Diecasting	
Enclosure	IP66	
Explosion Proof type	Ex ia IIC T5/ T6	
Weight	0.82kg (1.8lb)	

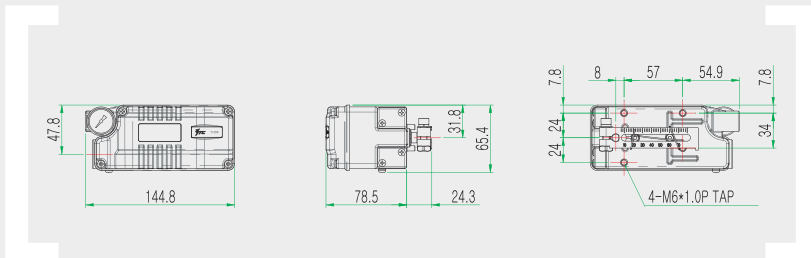

YT-2700 Compact smart valve positioner accurately controls valve stroke, according to input signal of 4-20mA being delivered from controller.

- Fail freeze function
- Near zero air consumption level
- HART communication
- Fail safe function
- PD control
- 4 buttons for local control
- LCD display
- Feedback signal
- Auto calibration
- Single acting only