


SPECIFICATIONS			
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/YELLOW		
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
RATED CURRENT [A]	8.0 A		
RATED VOLTAGE [V]	600 V PVC/YELLOW		
OUTER JACKET MATERIAL/COLOR			
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS [AWG]	6x18 AWG		
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67		

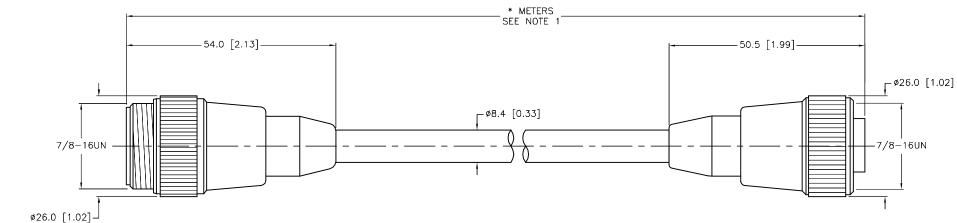

CABLE LENGTH	BLE LENGTH TOLERANCE*					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0–7mm	±0.5mm ±1.0mm ±2.0mm					
8–29mm						
30–49mm						
50-69mm	±3.0mm					
70–100mm	±4.0mm					
0VER 100mm	00mm ±5.0mm					
* UNLESS OTHERWISE SPECIFIED						

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

DATE

		RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	Sensors and Automation Controls	3000 CAMPUS MINNEAPOLIS, MN 1-800-544-7 (763) 553-7 (763) 553-0 turck.com	55441 7769 300 708 fax
		MATERIAL		DRFT RDS	DATE 06/29/09	DESCRIPTION RSM RKM (61 *M	
		SEE SPECIFICATIONS	DISPLAYED ON THIS	APVD	SCALE 1=1.0		01-10	
			DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
		FINISH	CONTACT TUDOK	MILLIMETE		IDENTIFICATION NO.		REV A
4		SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION					A
Τ	ECO NO.			DO NOT SCALE	THIS DRAWING	FILE: 777001773	SHEET	1 OF 1

A DRAWING RELEASE RDS 03/19/14 REV DESCRIPTION ΒY

SOURCE DRAWING - FOR REFERENCE ONLY