


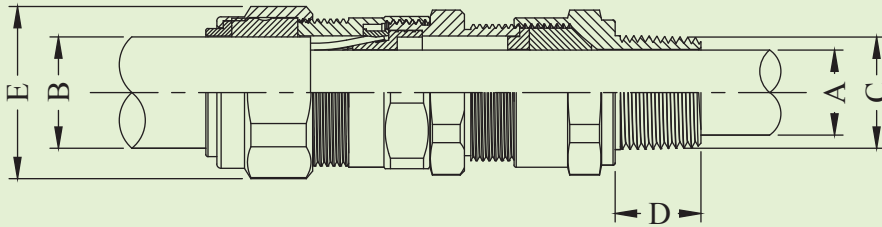


Cable Gland for armoured steel wire



Product Description

- Applicable Location : Zone 1&2, Zone 21&22
- Explosion Protection :  II 2 G Ex db IIC Gb
 II 2 G Ex eb IIC Gb
 II 2 D Ex tb IIIC Db
- Material : Stainless Steel, Silicone
- Operating Temperature : -40°C ~ + 95 °C
- Standard : IEC/EN 60079-0, IEC/EN 60079-1
 IEC/EN 60079-7, IEC/EN 60079-31
- Thread Size : NPT 3/4", NPT 1/2"
- Protection Rating : IP66



Part Number	Entry Thread Size "C"	Cable Acceptance Inner Sheath "A"		Cable Acceptance Outer Sheath "B"		Armour Range		Thread Length "D"	Across Corners "E"
		Max	Min	Max	Min	Max	Min		
THT-2AN012UX150400	NPT1/2"	14.0mm	6.5mm	20.9mm	12.5mm	1.25mm	0.9mm	18.95mm	34.0mm
THT-2AN034UX150801	NPT3/4"	20.0mm	11.1mm	26.2mm	18.2mm	1.6mm	1.25mm	20.15mm	40.5mm