

MODEL 387FM 2 VALVE MANIFOLD


FLAT AND PANEL MOUNTED

The Model 387FM 2 valve manifold has been designed to be remotely mounted when used with gauge pressure transmitters, pressure switches, absolute pressure transmitters or pressure gauges. Its flat style and directly opposed bonnets provide isolating and calibrating functions in a compact unit.

This design is suitable for applications up to 6,000psi (420Bar)



Introduction

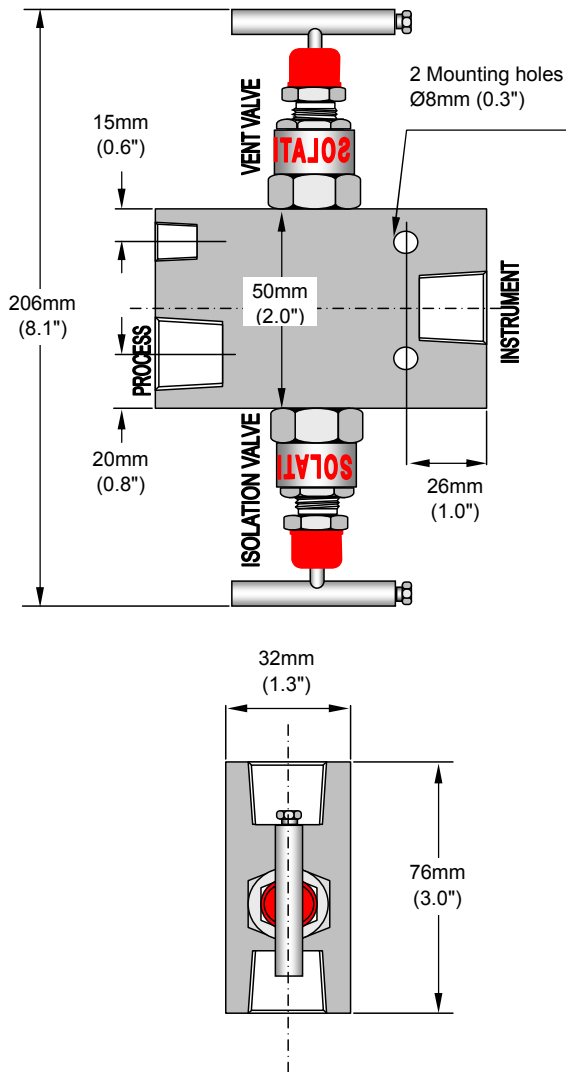

Specifications

Material of Construction:

SS316, Carbon Steel, Monel, Hastelloy

Test Pressure (at 25°C Room Temperature)

Hydrostatic:	Body	-	620Bar
	Seat	-	415Bar
Pneumatic:	Seat	-	40Bar

Gland Packing

PTFE	:	Standard
Graphoil	:	Temperatures Above 180°C

Finish

CS: Zinc Plated; SS: Natural

Connection:

See below

Weight

1.50LBS (700g)

Accessories

None

Order Information

Model	Description		
387FM	2 Valve Manifold, Female x Female connection		
	Code	Inlet	Outlet
	01	1/4" NPT	1/4" NPT
	02	3/8" NPT	3/8" NPT
	03	1/2" NPT	1/2" NPT
	Code	Materials of Construction	
	S2	SS 316	
	CS	Carbon Steel	
	MN	Monel 400	
	HA	Hastelloy C	
	XX	Other (Specify)	
	Code	Packing Material	
	TF	Teflon	
	GR	Grafoil	
	XX	Other (Specify)	
387FM	03	S2	TF