# **Incremental Encoders**



#### **Economy**, optical

## 3700 / 3720 (Shaft / Hollow shaft)

### Push-Pull / RS422



The incremental economy encoders type 3700 / 3720 with optical sensor technology are a particularly compact and economical solution.

The carbon-fibre reinforced plastic housing of these incremental encoders is, nevertheless, extremely robust and resistant.













Reverse polarity Magnetic field protection

High protection

#### Reliable

- Tube Tech<sup>®</sup> cable outlet with extremely high strain relief
- · Ideal for outdoor use thanks to high IP protection

#### **Versatile**

- · Through hollow shaft up to 8 mm
- · Compact size of only 37 mm
- Up to 1024 pulses per revolution

# Order code **Shaft version**

8.3700





If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.  $\Omega$ ts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

1 = without fixing attachment

A = flange adapter, mounted

Shaft (ø x L), with flat

 $1 = \emptyset 4 \times 12.5 \text{ mm}$ 

 $2 = \emptyset 5 \times 12,5 \text{ mm}$ 

 $3 = \emptyset 6 \times 12,5 \text{ mm}$ 

4 = Ø 6,35 (1/4") x 12,5 mm

 $6 = \emptyset 8 \times 12,5 \text{ mm}$ 

Output circuit / Power supply

 $1 = RS422 / 5 V DC \pm 5 \%$ 

3 = Push-Pull (with inverted signal) / 5 ... 30 V DC

4 = Push-Pull (with inverted signal) / 10 ... 30 V DC

Type of connection 2)

1 = axial cable (1 m PVC cable)

2 = radial cable (1 m PVC cable)

3 = axial cable (2 m PVC cable) 4 = radial cable (2 m PVC cable)

5 = axial cable (3 m PVC cable)

6 = radial cable (3 m PVC cable)

7 = axial cable (5 m PVC cable)

8 = radial cable (5 m PVC cable)

Pulse rate

10, 25, 50, 60, 100, 200, 250, 300, <u>360</u>, 400, <u>500</u>, <u>512</u>, 600, <u>1000</u>, <u>1024</u> (e.g. 360 pulses => 0360)

Other pulse rates on request

Stock types

8.3700.1332.0050 8.3700.1332.0360 8.3700.1332.0500 8 3700 1332 1000 8.3700.1332.1024

### Order code **Hollow shaft**

8.3720 Type



If for each parameter of an encoder the  $\underline{\textbf{underlined preferred option}}$  is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Ots. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange / through hollow shaft

1 = with short torque stop

2 = with long torque stop

 $\mathbf{5} = \mathbf{with} \ \mathbf{stator} \ \mathbf{coupling} \ \mathbf{double-winged}$ 

Hollow shaft

 $1 = \emptyset 4 \text{ mm}$ 

 $2 = \emptyset 5 \text{ mm}$ 

 $3 = \emptyset 6 \text{ mm}$  $4 = \emptyset 6,35 \text{ mm } (1/4")$ 

 $6 = \emptyset 8 \text{ mm}$ 

© Output circuit / Power supply

 $1 = RS422 / 5 V DC \pm 5 \%$ 

3 = Push-Pull (with inverted signal) / 5 ... 30 V DC

4 = Push-Pull (with inverted signal) / 10 ... 30 V DC

Type of connection <sup>2)</sup>

1 = radial cable (1 m PVC cable)

2 = radial cable (2 m PVC cable)

3 = radial cable (3 m PVC cable) 4 = radial cable (5 m PVC cable)

Pulse rate

10, 25, 50, 60, 100, 200, 250, 300, **360**, 400, **500**, **512**, 600, **1000**, **1024** (e.g. 360 pulses => 0360)

Other pulse rates on request

Stock types 8.3720.5631.0360

8.3720.5611.1024

8.0000.1201.0606

8 3720 5631 1000 8.3720.5631.1024

# Mounting accessory for shaft encoders

Coupling Bellows coupling ø 15 mm for shaft 6 mm

Additional connectors can be found in the Connection Technology section or in the Connection Technology area of our website at: www.kuebler.com/connection\_technology.

Further accessories can be found in the Accessories section or in the Accessories area of our website at: www.kuebler.com/accessories

1) "Tube Tech®" cable outlet guarantees 10 x higher strain relief than traditional cabling

methods plus higher IP-Protection. Other cable lengths are available on request.



# **Incremental Encoders**

#### **Economy, optical** 3700 / 3720 (Shaft / Hollow shaft) Push-Pull / RS422


Mechanical characteristics							
Speed		max. 6 000 min <sup>-1</sup>					
Rotor moment of inertia	shaft version hollow shaft version	approx. 0.4 x 10 <sup>-6</sup> kgm <sup>2</sup> 1.4 x 10 <sup>-6</sup> kgm <sup>2</sup>					
Starting torque	shaft version hollow shaft version	< 0.007 Nm < 0.01 Nm					
Shaft load capacity	radial axial	20 N 10 N					
Weight		approx. 0.1 kg					
Protection to EN 60529	bearings, shaft cable outlet	IP65 IP67					
EX approval for hazardous	optional Zone 2 and 22						
Working temperature range	-20°C +70°C 1)						
Materials	shaft / hollow shaft housing, flange cable	stainless steel PPA, 40% CF (carbon fibre) PVC					
Shock resistance acc. to El	1000 m/s <sup>2</sup> , 6 ms						
Vibration resistance acc. to	100 m/s², 10 2000 Hz						

Electrical characteristics							
Output circuit	RS422 (TTL compatible)	Push-Pull (7272 comp.) <sup>4)</sup>	<b>Push-Pull</b> (7272comp.) <sup>4)</sup>				
Supply voltage	5 V (±5%)	5 30 V DC	10 30 V DC				
Power consumption with inverted signal (no load)	typ. 40 mA / max. 90 mA	typ. 50 mA/ max. 100 mA	typ. 50 mA/ max. 100 mA				
Permissible load / channel	el max. ±20 mA	max. ±20 mA	max. ±20 mA				
Pulse frequency	max. 250 kHz	max. 250 kHz	max. 250 kHz				
Signal level high low		min. $U_B$ - 2.0 V max. 0.5 V	min. U <sub>B</sub> - 2.0 V max. 0.5 V				
Rising edge time t <sub>r</sub>	max. 200 ns	max. 1 µs	max. 1 μs				
Falling edge time t <sub>f</sub>	max. 200 ns	max. 1 µs	max. 1 µs				
Short circuit proof outputs 2)	yes <sup>3)</sup>	yes	yes				
Reverse polarity protection of the power supply	no	no	yes				
UL approval	File 224618						
<b>CE compliant</b> acc. to EN 61000-6-2, EN 61000-6-4 and EN 61000-6-3							
RoHS compliant acc. to EU guideline 2002/95/EG							

#### **Terminal assignment**

output circuit	Type of connection	Cable								
1, 3, 4	1 8	Signal:	0 V	+V	А	Ā	В	B	0	ō
		Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD

#### **Dimensions shaft version**

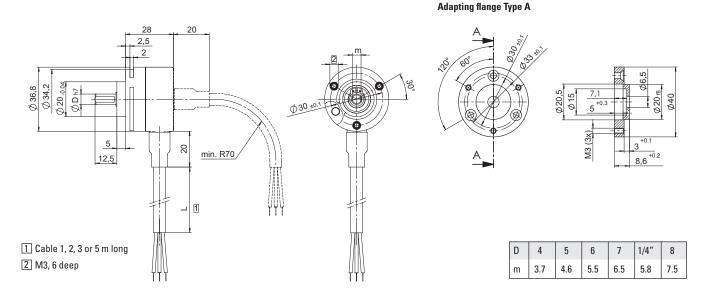

#### Mounting advice

The flanges and shafts of the encoder and drive should not both be rigidly coupled together at the same time! We recommend the use of suitable couplings (see Accessories section).

© Fritz Kübler GmbH, subject to errors and changes. 03/2012

- 1) For versions with push-pull output and supply voltage >15 V DC: max. 55°C
  2) If supply voltage correctly applied.

- 3) Only one channel allowed to be shorted-out: If  $U_B=5\,V$  short circuit to channel, 0 V, or  $+U_B$  is permitted. If  $U_B=5\,...\,30\,V$  short circuit to channel or 0 V is permitted.
- 4) Max. recommended cable length 30 m



# **Incremental Encoders**

# **Economy, optical**


# 3700 / 3720 (Shaft / Hollow shaft)

# Push-Pull / RS422

#### **Dimensions hollow shaft version**


#### Flange with torque stop short


Long torque stop version is shown dashed

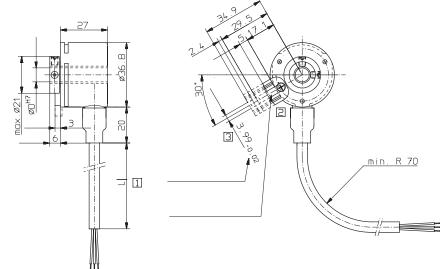

- 1 Cable length 1, 2, 3 or 5 m
- 2 Slot for torque stop, 3 mm deep
- 3 Torque stop slot, Recommendation: Cylindrical pin DIN7, ø 4 mm

#### Flange with stator coupling, double-winged

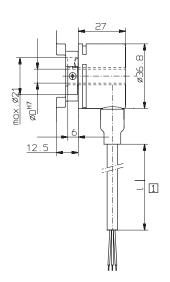

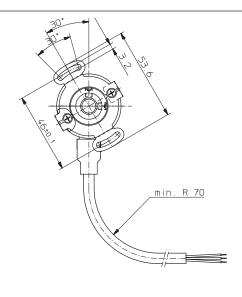

1 Cable length 1, 2, 3 or 5 mm